




Preparing for Your Reopening

Air Filtration Refresh

Your building requires safety checks prior to reopening. [Healthy buildings experts](#) suggest replacing current air filters as part of this process, possibly upgrading filter efficiency to capture even more small particles, helping to keep your customers and employees safe from airborne pathogens.

Did you know?

Virus particles can piggyback on larger dust particles or droplets and travel through a building.

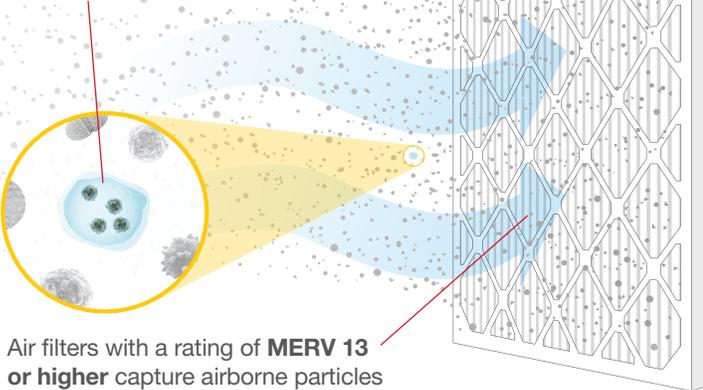


Air filters with a rating of **MERV 13 or higher** capture airborne particles between 0.3 and 1.0 microns.

Consider Upgrading

✓ MERV 13

A **MERV 13** air filter captures more than 95% of virus-carrying particles in **3 air changes**.* If you rely on a MERV 7, 8, or 9 air filter, you would have to cycle air through your filter **10 or more times** to remove the same amount of these particles.

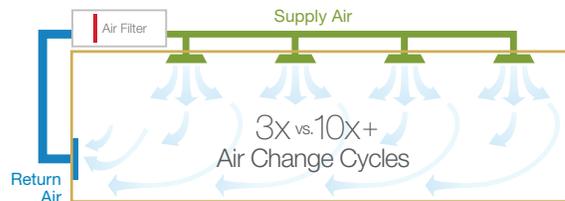

*Air change refers to the complete replacement of a volume of air within an indoor space with an equal volume of newly filtered air.

Replacing Your Air Filter

Safety First

To properly dispose of dirty air filters, wear gloves, a mask and safety glasses when carefully removing filters from system.



Bag Disposal

Place dirty filters into bags to prevent dust and particles from dislodging.



Insert Clean Air Filter

Place clean air filters inside the unit with the air flow arrow pointing towards the blower motor.



For more information on [filtration and disinfection](#), view tips & suggestions from ASHRAE (American Society for Heating, Refrigeration, and Air-Conditioning Engineers).

Receive a Free
Air Filtration Audit



Contact an AAF Flanders representative today to discuss this FREE assessment, so you can upgrade your air filtration without overtaxing your HVAC system.

